




[Brock's Performance](http://www.brocksp.com) • 4064 E. Patterson Road • Dayton, OH 45430 • Phone: 937-912-0054 • Fax: 937-912-0062

Suzuki GSX-R1000 (2017) PAIR Block-Off Cap Installation Instructions

The black cap (#831621) included with your GSX-R1000 (2017) exhaust system purchase is used to block off emissions (PAIR) to help prevent 'deceleration pop' and also prevent ram-air pressure loss from the airbox.

Installation Instructions:

- Remove seat and front frame covers. Prop up fuel tank and remove airbox (see factory service manual).
- **Note:** Be careful to avoid debris entering the throttle bodies; cover with clean rags while working.
- Locate the PAIR hose on the right-hand side of the airbox (see Figures 1 and 2).
- Install the supplied cap onto the PAIR nipple located on the underside of the airbox (Figure 3).
- Lubricate the block-off cap/nipple with WD-40 or Windex. Place the PAIR hose over the block-off cap/nipple and install OEM hose clamp (See Figure 4).
- Install the airbox. Lower the fuel tank. Install front frame covers and seat (see factory service manual).

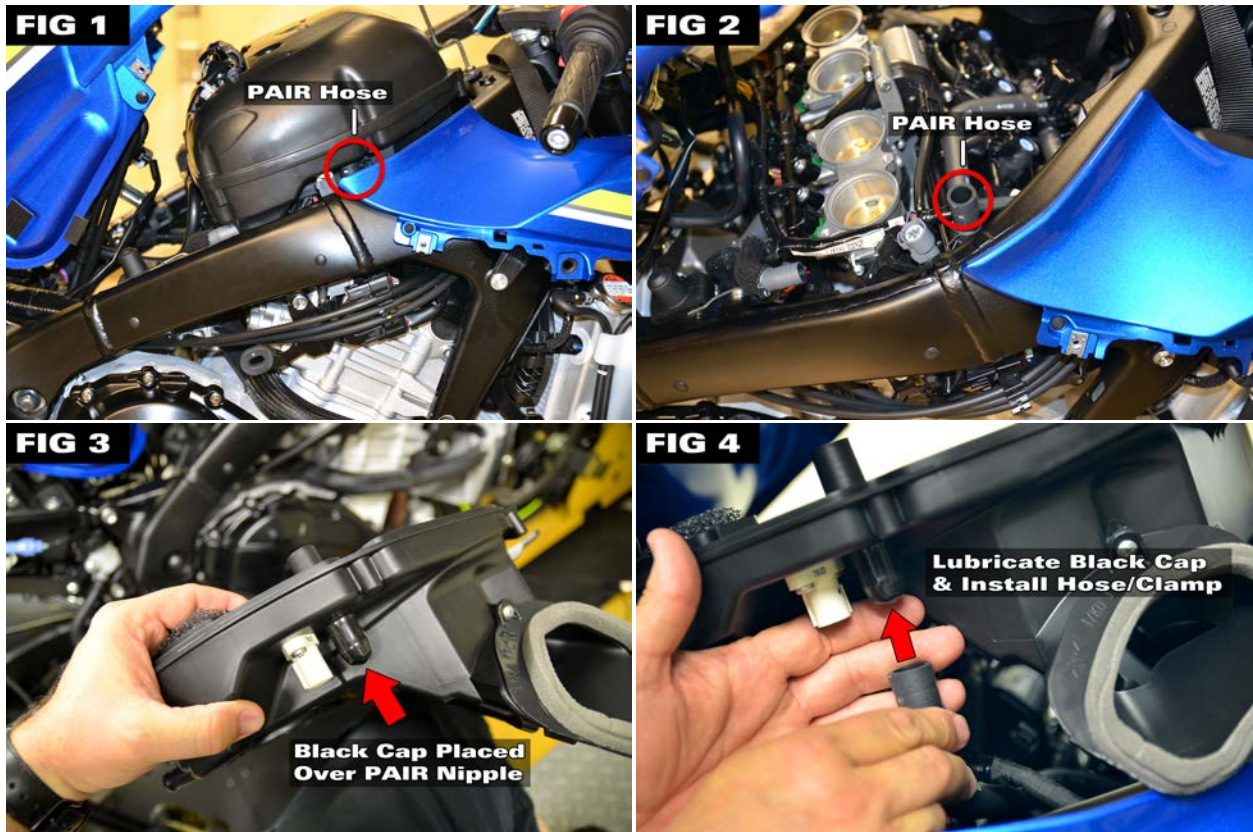

All Brock's Performance products are designed for closed-course racetrack use ONLY!

For more information on Brock's Performance Warranty and Terms and Conditions: www.BrocksPerformance.com
> About Us > Terms and Conditions

For Questions and Comments: www.BrocksPerformance.com > Customer Service > Contact Us
or call the Tech Line 937-912-0054