



[Brock's Performance](#) • 4064 E. Patterson Road • Dayton, OH 45430 • Phone: 937-912-0054 • Fax: 937-912-0062

WHEEL SPEED SENSOR EXTENSION HARNESS GSX-R1000 (17-18) HAYABUSA (13-18) PRODUCT INFORMATION

For extended bike applications, this Wheel Speed Sensor (WSS) Extension Harness simply plugs in-line with the OEM wheel speed sensor. No cutting or splicing required. Functions with the OEM ABS and TCS.

Package Contents:

WSS Extension Harness shown:

1. One (1) WSS Extension Harness
2. One (1) Product Information Page

If your package contents differ, please contact Brock's Performance at 937-912-0054.

For additional installation support please refer to the OEM service manual.


Installation Notes:

GSX-R1000 (17-18)

- Remove right side frame cover.
- Disconnect the blue WSS connector (Figure 1).
- Remove the quick-release tie wrap (can be reused) securing the WSS wiring (Figure 1).
- Plug the WSS extension harness in-line with the OEM WSS wiring.
- Route wiring along the swingarm. Check for secure fit and clearance around any moving parts/exhaust.

Hayabusa (13-18)

- Lift and support the fuel tank
- Disconnect WSS connector
- Plug the WSS extension harness in-line with the OEM WSS wiring
- Route wiring along the swingarm. Check for secure fit and clearance around any moving parts/exhaust.

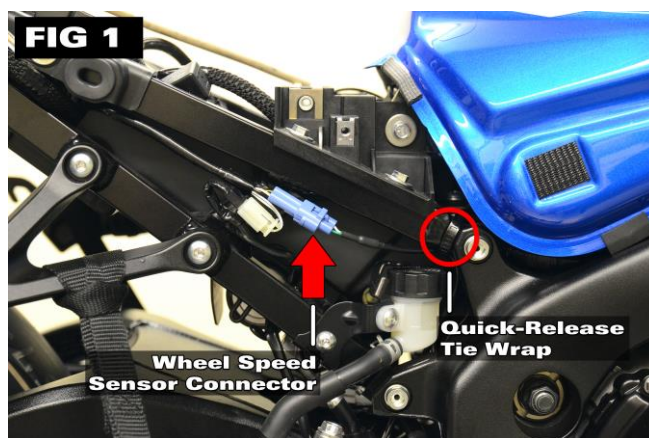

ALL BROCK'S PERFORMANCE PRODUCTS ARE DESIGNED FOR CLOSED-COURSE RACETRACK USE ONLY!

For more information on Brock's Performance Warranty and Terms and Conditions:
[BrocksPerformance.com](#) > **Brock's Support** > **Customer Service** > **Terms and Conditions**

For Questions and Comments:
[BrocksPerformance.com](#) > **Brock's Support** > **Customer Service** > **Contact Us** or call 937-912-0054