


2005-06 Suzuki GSX-R1000: Check F.I. Light Disconnect Instructions

When installing any Brock's Performance Products Exhaust System on the 2005 GSX-R1000, the following procedure must be followed to prevent illumination of the check F.I. Light.

1. Disconnect the cables from the factory exhaust control valve actuator (EXCVA) located under seat/gas tank on the right side of the bike. DO NOT unplug the EXCVA electrical connectors from the wiring harness. Do not remove the EXCVA unit.
2. Remove the OEM exhaust system, exhaust control valve and cables.
3. Install your Brock's Performance Exhaust System according to the supplied instructions.
4. Locate the Black wire with Brown tracer (with two green dots) at the left side ECM coupler. See Photo below.
5. Cut the wire approximately 1.5 inches back from the coupler and insulate both ends with electrical tape.

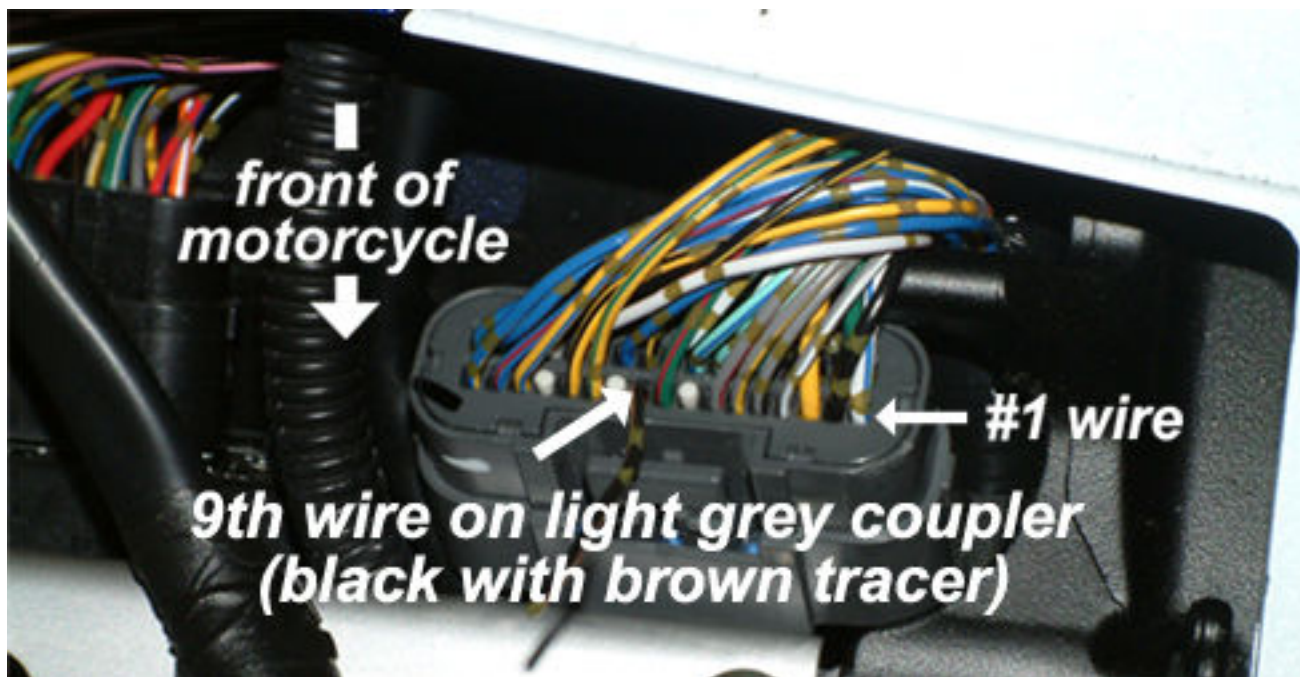

The motorcycle may now be operated in normal fashion without the check F.I. light illuminated.

Note: the "bow-tie" plate included with your exhaust system is NOT required if the above modification is performed.

Brock's Performance Products are designed for Closed-Course Racetrack use ONLY!

For more information go to www.BrocksPerformance.com, click: **Installation Instructions**

email: advice@brockracing.com or call the **Tech Line 937-912-0061**

Brock's Performance Products policies and warranty information: www.BrocksPerformance.com, click: **Policies**