



Brock's Performance • 4064 E. Patterson Road • Dayton, OH 45430 • Phone: 937-912-0054 • Fax: 937-912-0062

NINJA H2 (2015) HEAVY DUTY CLUTCH SPRING KIT INSTALLATION INSTRUCTIONS

The HD Clutch Spring Kit is designed to increase the spring pressure at the clutch plates. Increased spring pressure is necessary for increased power applications to prevent clutch slippage and increase clutch life.

Check Package Contents:

The Package Contents Include:

1. Six (6) Spring Tops
2. Six (6) Extra Heavy Duty Clutch Springs
3. Twelve (12) .062" Shims



If your package contents differ, please contact Brock's Performance at 937-912-0054.



For additional installation support please refer to the OEM service manual.

Special Notes:

- Inspect the clutch fully for any signs of wear and/or damage before installation. Replace parts as needed.
- The heavy duty clutch spring must have a minimum of .124" of shim thickness installed.
- Additional clutch spring spacers can be purchased at Brocksperformance.com.

Instructions:

1. Support the bike using a wheel stand or lift.
2. Remove the clutch cover.
3. Remove six (6) OEM springs and spring tops (these will not be reused).
4. Install the heavy duty clutch springs, steel shims (2 shims per spring), and spring tops (Fig 1).
5. Secure using the OEM bolts and torque to 97 lb-in (11 N·m).
6. Install the clutch cover and torque mounting bolts to 106 lb-in (12 N·m) (Fig 2).

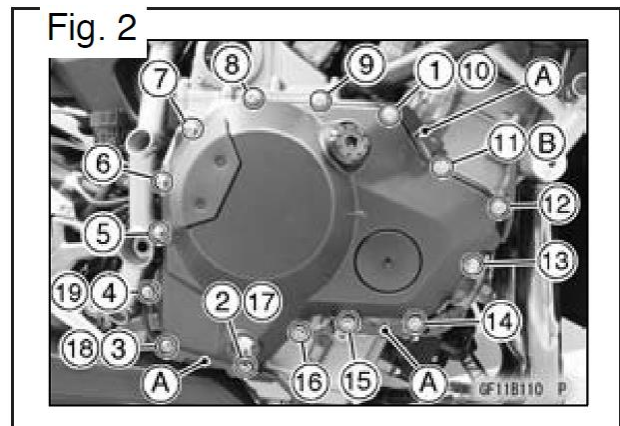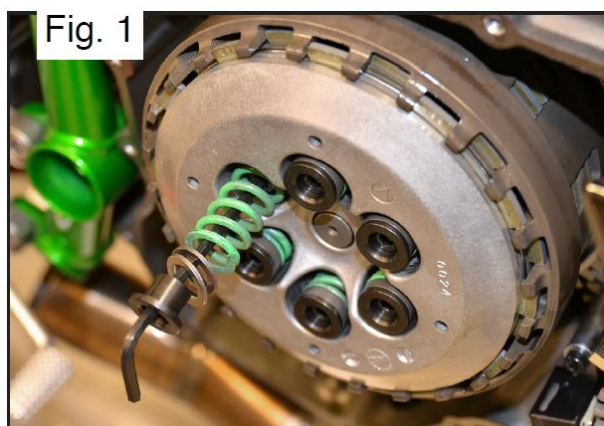

ALL BROCK'S PERFORMANCE PRODUCTS ARE DESIGNED FOR CLOSED-COURSE RACETRACK USE ONLY!

For more information on Brock's Performance Warranty and Terms and Conditions:

BrocksPerformance.com > **Brock's Support** > **Customer Service** > **Terms and Conditions**

For Questions and Comments:

BrocksPerformance.com > **Brock's Support** > **Customer Service** > **Contact us or call 937-912-0054**