



1999-2011 HAYABUSA-ADJUSTABLE LOWERING LINKS-3 HOLE: P/N: 240447 (S13-LL-SET)

Note: These instructions and additional details can be found at:
www.BrocksPerformance.com

1. Rear of bike **MUST** be **SOUNDLY SECURED** during installation! (Fig 1) See Helpful Hint Below.
2. Belly Pan Mounting Bracket must be modified to utilize Position #1 **ONLY**. (Fig 2)
3. No modifications needed for position #2 or #3.
4. Check drive-chain adjustment after installation.
5. Side Stand may have to be shortened.
6. Torque to 78 N.m (56.5 lb-ft).

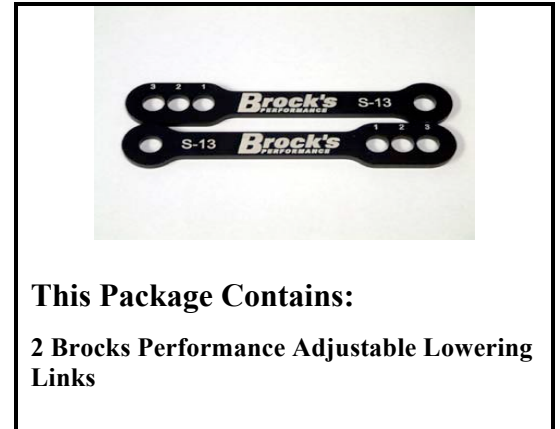


Fig 1

WARNING: Chassis adjustments can alter the handling characteristics of the machine. A lowered vehicle is more likely to experience obstacle and cornering clearance contact problems, especially with the addition of a passenger. This product is designed for closed-course drag strip use only!

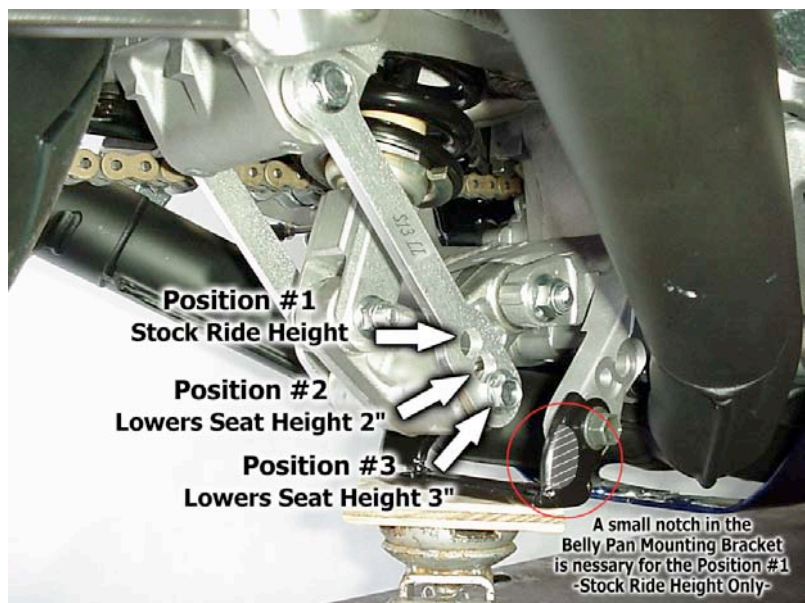


Fig 2

HELPFUL HINT: We have found that a rear stand and floor jack are most useful during installation and adjustments. A thin block of wood placed between the belly pan-mounting bracket and the floor jack allows the bike to move in the direction required, without damaging the bracket.

All Brock's Performance products are designed for closed-course race-track use ONLY

For more information on Brock's Performance Warranty and Terms and Conditions:
www.BrocksPerformance.com > About Us > Terms and Conditions

For Questions and Comments:
www.BrocksPerformance.com > Customer Service > Contact Us or call the Tech Line 937-912-0061