



[Brock's Performance • 4064 E. Patterson Road • Dayton, OH 45430 • Phone: 937-912-0054 • Fax: 937-912-0062](#)

KAWASAKI NINJA 300 (13-15) PAIR BLOCK-OFF INSTALLATION INSTRUCTIONS


The black cap (#832648) included with your Ninja 300 (13-15) exhaust system purchase is used to block off emissions (PAIR) to help prevent 'deceleration pop' and also prevent ram-air pressure loss from the airbox after blocking the PAIR.

1. The PAIR hose is located on the left-hand side of the bike (See Figure 1). Remove the left-hand side fairings for easy access to the PAIR hose. Refer to your factory manual for fairing removal if necessary.

2. With the side fairings removed you can now see the PAIR hose coming out of the top of the engine (See Figure 2).

3. Remove the PAIR hose and insert the black cap (#832648) that was included with your exhaust system purchase into the hose. Wet the cap a little with Windex or WD-40 and use a 3/8" drive extension or sharpie marker to push the cap in.

4. Make sure the cap is inserted far enough (at least 1") to allow for the hose to be reinstalled. Reinstall the PAIR hose onto the engine plate from which it was removed (Figure 2).

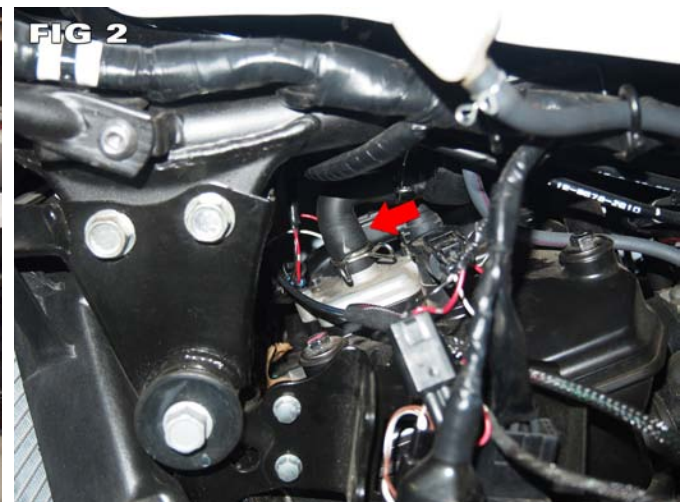

All Brock's Performance products are designed for closed-course racetrack use ONLY!

For more information on Brock's Performance Warranty and Terms and Conditions: www.BrocksPerformance.com
> About Us > Terms and Conditions

For Questions and Comments: www.BrocksPerformance.com > Customer Service > Contact Us
or call the Tech Line 937-912-0054