



Brock's Performance • 4064 E. Patterson Road • Dayton, OH 45430 • Phone: 937-912-0054 • Fax: 937-912-0062

YAMAHA YZF-R1/M (15-) PAIR BLOCK-OFF CAP (#832648) INSTALLATION INSTRUCTIONS


The PAIR block-off cap (#832648) included with your YZF-R1/M (15-) exhaust system purchase is used to block-off emissions (PAIR) to help prevent 'deceleration pop' and also prevent ram-air pressure loss from the airbox after blocking the PAIR. It is necessary to remove the seat, fuel tank covers, fuel tank and airbox to access the PAIR valve hose, refer to the factory service manual for additional information.



1. Remove the seat, fuel tank covers, fuel tank and airbox to fully access the PAIR valve hose (*see factory service manual for removal instructions*).
2. Locate the PAIR valve hose on the right side of the airbox. Shown in Figure 1.
3. Insert the PAIR block-off cap (#832648) into the hose (lubricate the cap with Windex or WD-40 and use a 3/8" drive extension or sharpie marker to push the cap into the hose.) Shown in Figure 2.
Note: Insert the cap far enough (at least 1") to allow for the hose to be reinstalled on airbox.
4. Reinstall the airbox and attach the PAIR valve hose using the OEM spring clamp.
5. Reinstall the fuel tank, fuel tank covers and seat (*see factory service manual for installation instructions*).

The Yamaha YZF-R1/M (2015) Factory Service Manual can be found here:

BrocksPerformance.com > [Customer Service](#) > [Installation Instructions](#) > [YZF-R1/M Service Manual](#)

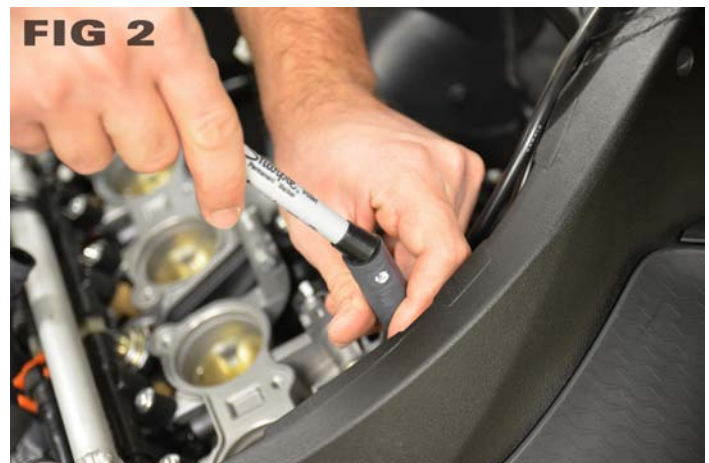

All Brock's Performance products are designed for closed-course racetrack use ONLY!

For more information on Brock's Performance Warranty and Terms and Conditions: www.BrocksPerformance.com
> [About Us](#) > [Terms and Conditions](#)

For Questions and Comments: www.BrocksPerformance.com > [Customer Service](#) > [Contact Us](#)
or call the Tech Line 937-912-0054