

# Brock's PERFORMANCE

Brock's Performance Products • 4064 East Patterson Road • Dayton, OH 45430 • Phone: 937-912-0054 • Fax: 937-912-0062

## Radial Mount Front End Lowering Kit For BMW S1000RR, Ninja H2 and ZX-10R (16- )




### INSTALL RADIAL MOUNT BRACKETS

Remove the top and bottom brake caliper mounting bolts. Re-insert bolts through the radial mount brackets with the notched area facing toward the brake caliper as shown. Torque bolts to 38 Nm (28 lb-ft). Repeat on opposite side.




ABS models: The wheel speed sensor cable bracket will need to be moved to on top of the radial mount bracket. Remove the cable from the bracket and install the bracket as shown. Replace cable into the bracket.

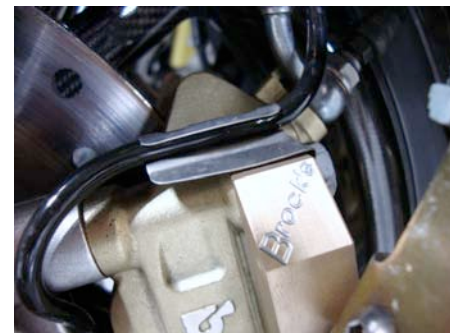



### INSTALL STRAP END KIT

Cut the short strap and end bracket from the buckle. Place Brock's Performance strap end bracket into the buckle, install the supplied bolt, lock washer, and nut. Tighten the nut securely. *Do not over tighten and distort the buckle, the release mechanism will become jammed and not function correctly.*

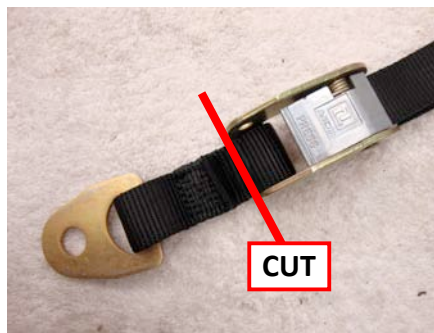


## INSTALL STRAP

Always route strap under any cables and wires to prevent pinching or damage. Do not allow the strap to twist. On each side of the frame at the steering neck are zip ties securing wiring to clips, cut the zip ties to release the wires from the clips and place zip ties around the wires only. Install the release buckle on the left side of the bike (while seated) using the M10x25 bolt and serrated washer. Hand tighten. Route the strap upward over the steering neck and down the other side. Secure the remaining end of strap with the M10x20 bolt and serrated washer. Tighten strap to align the ends and torque the M10 bolts to 38 Nm (28 lb-ft).

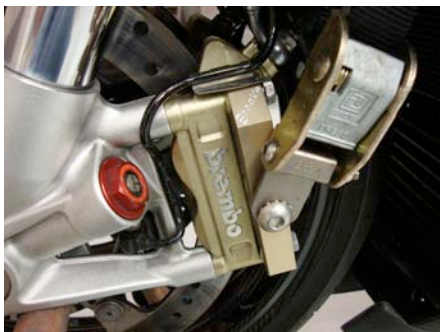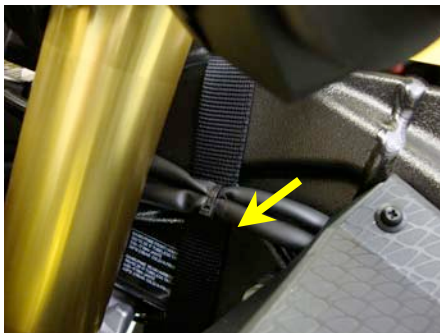

## OPERATION

To lower front end: Apply moderate pressure to front brake lever, lunge forward to compress front forks while simultaneously pulling upward on strap handle. **Attention: BIKE MAY FALL OVER!** Short kickstands are required when bike is lowered. Contact Brock's Performance for details.

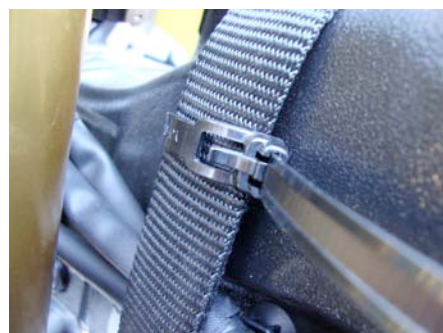

**DANGER: Strap handle MUST be securely fastened.** A loss of control can occur if the strap handle becomes tangled in the front wheel or brake assembly. Brock's Performance supplies reusable zip ties to secure the handle in a safe location.



PRESS TO  
RELEASE

To raise front end: Press release on the buckle.

Brocks Performance Products are designed for Closed-Course Race Track use **ONLY**.  
 Brocks Performance Products policies and warranty information: [www.BrocksPerformance.com](http://www.BrocksPerformance.com)  
 For additional information: Check our Information Forum at [www.BrocksPerformance.com](http://www.BrocksPerformance.com)  
 E-mail [advice@BrocksPerformance.com](mailto:advice@BrocksPerformance.com) or call the Order Line 937-912-0054.