



[Brock's Performance](#) • 4064 E. Patterson Road • Dayton, OH 45430 • Phone: 937-912-0054 • Fax: 937-912-0062


## KAWASAKI Z900RS (2018) BrockSTAND™ PRODUCT INFORMATION

The Z900RS BrockSTAND™ is designed to easily provide users with a full range of adjustability from lowered to stock applications using only a 4mm hex key. Adjustment ranges: 0.00" to -2.50"

### Package Contents:

Z900RS BrockSTAND™ shown:

1. One (1) Black Anodized Body
2. One (1) Black Anodized Foot
3. One (1) Adjustment Bolt
4. One (1) Spring Mounting Stud
5. One (1) Blue Threadlocker 0.5ml (not shown)

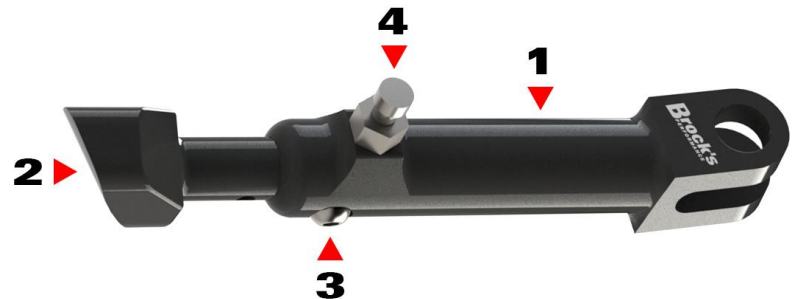

If your package contents differ, please contact Brock's Performance at 937-912-0054.

### Installation Notes:

- Install using the OEM kill switch, springs, and mounting hardware. *(See factory service manual for detailed instructions.)*
- When adjusting the foot length, it is recommended to apply blue threadlocker (supplied) to the threads of the Adjustment Bolt (3) before installation.
- Red threadlocker is applied to the Spring Mounting Stud (4) threads during factory assembly. The Spring Mounting Stud (4) should not be removed. In the event removal is required, apply red threadlocker to the threads before installation.
- **Installation Tip:** To ease spring removal/installation, fold the kickstand down to fully extend the spring. Place a penny between each of the open spring coils. When the kickstand is folded up, the spring will remain extended and be easier to remove/install.

**ALL BROCK'S PERFORMANCE PRODUCTS ARE DESIGNED FOR CLOSED-COURSE RACETRACK USE ONLY!**

For more information on Brock's Performance Warranty and Terms and Conditions:  
[BrocksPerformance.com](#) > [Brock's Support](#) > [Customer Service](#) > [Terms and Conditions](#)

For Questions and Comments:  
[BrocksPerformance.com](#) > [Brock's Support](#) > [Customer Service](#) > [Contact Us](#) or call 937-912-0054