



Brock's Performance • 4064 E. Patterson Road • Dayton, OH 45430 • Phone: 937-912-0054 • Fax: 937-912-0062

KAWASAKI Z900RS (2018) VELOCITY STACK KIT INSTALLATION INSTRUCTIONS

The Brock's Performance Velocity Stack Kit for the Kawasaki Z900RS (2018) is an airbox mod designed to maximize airflow for increased midrange performance and peak power.

Package Contents:

Velocity Stack Kit shown:

1. Two (2) Velocity Stacks

If your package contents differ, please contact Brock's Performance at 937-912-0054.

For additional installation support please refer to the OEM service manual.



FIG 1

Installation Instructions:

1. Support the bike using a wheel stand or lift.
2. Raise and support front of fuel tank.
3. Remove air cleaner housing.
4. Remove air cleaner housing cover.
5. Remove OEM velocity stacks.
 - a. Inner velocity stacks (#2 & #3) will not be reused.
 - b. Outer velocity stacks (#1 & #4) will be relocated.
6. Cut off clamp locator nipple on supplied stacks (Fig 2).
7. Install OEM outer velocity stacks (#1 & #4) to the two middle positions (#2 & #3) (Fig 1).
 - a. The tabs on the bottom of the stacks align to the outer tab on the air cleaner housing (Fig 3).
8. Install supplied velocity stacks to the two outer cylinders (#1 & #4) (Fig 1).
9. Install air cleaner housing cover.
10. Install air cleaner housing.
11. Torque velocity stack clamps to 18 lb-in (2.0 N·m).
12. Reinstall fuel tank.
13. Start bike and check for any air leaks.

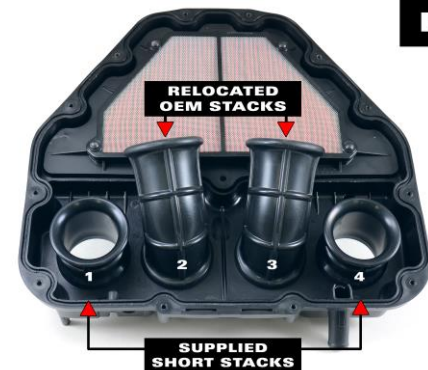


FIG 2



FIG 3



ALL BROCK'S PERFORMANCE PRODUCTS ARE DESIGNED FOR CLOSED-COURSE RACETRACK USE ONLY!

For more information on Brock's Performance Warranty and Terms and Conditions:

BrocksPerformance.com > Brock's Support > Customer Service > Terms and Conditions

For Questions and Comments:

BrocksPerformance.com > Brock's Support > Customer Service > Contact us or call 937-912-0054