



Brock's Performance • 4064 E. Patterson Road • Dayton, OH 45430 • Phone: 937-912-0054 • Fax: 937-912-0062

GSX-R1000 (07-08) CHECK ENGINE LIGHT DISCONNECT INSTRUCTIONS


When installing a Brock's Performance exhaust system on a Suzuki GSX-R1000 the following procedure must be followed to prevent illumination of the check engine light.

For additional installation support please refer to the OEM service manual.

Instructions:

Note: The "bowtie" plate included with the exhaust system is NOT required if this procedure is followed.

1. Disconnect the cables from the OEM exhaust control valve actuator (EXCVA) located under the seat/gas tank on the right side of the bike. DO NOT unplug the EXCVA electrical connectors from the wiring harness. Do not remove the EXCVA unit.
2. Remove the OEM exhaust system, exhaust control valve, and cables.
3. Install your Brock's Performance Exhaust System.
4. Locate the Black wire with Brown tracer (with two green dots) on the right side ECU (ECM) coupler.
5. Cut the wire approximately 1.5 inches (40 mm) back from the coupler and insulate both ends with electrical tape.
6. The motorcycle may now be operated in a normal fashion without the check engine light illuminated.

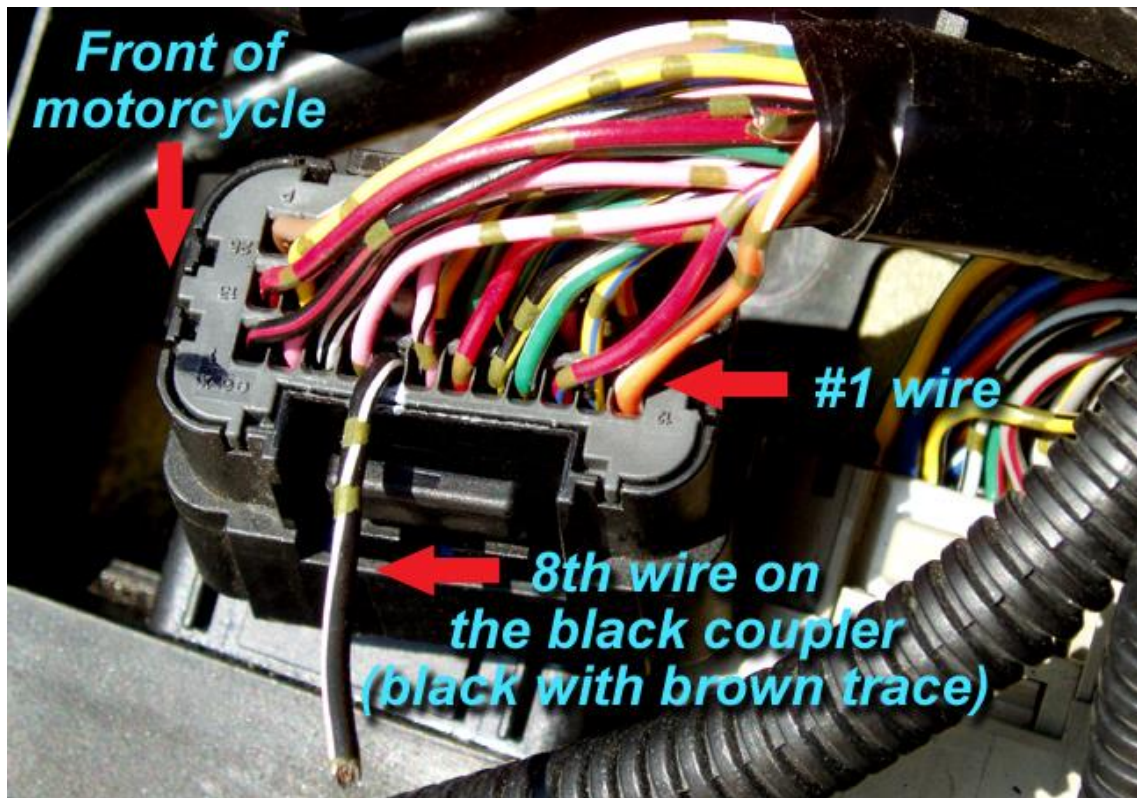

ALL BROCK'S PERFORMANCE PRODUCTS ARE DESIGNED FOR CLOSED-COURSE RACETRACK USE ONLY!

For more information on Brock's Performance Warranty and Terms and Conditions:

BrocksPerformance.com > Brock's Support > Customer Service > Terms and Conditions

For Questions and Comments:

BrocksPerformance.com > Brock's Support > Customer Service > Contact us or call 937-912-0054