Brock's Performance • 4064 E. Patterson Road • Dayton, OH 45430 • Phone: 937-912-0054 • Fax: 937-912-0062

WHEEL SPEED SENSOR EXTENSION HARNESS
HAYABUSA (13-26) & GSX-R1000 (17-27) PRODUCT INFORMATION

For extended bike applications, this Wheel Speed Sensor (WSS) Extension Harness simply plugs in-line with the OEM wheel speed sensor. No cutting or splicing required. Functions with the OEM ABS and TCS.

Package Contents:

WSS Extension Harness shown:

1. One (1) WSS Extension Harness

If your package contents differ, please contact Brock's Performance at 937-912-0054.

For additional installation support please refer to the OEM service manual.

Installation Notes:

GSX-R1000

- Remove the right-side frame cover.
- Disconnect the blue WSS connector (Fig 1).
- Remove the quick-release tie wrap (can be reused) securing the WSS wiring (Fig 1).
- Plug the WSS extension harness in line with the OEM WSS wiring.
- Route wiring along the swingarm. Check for secure fit and clearance around any moving parts/exhaust.

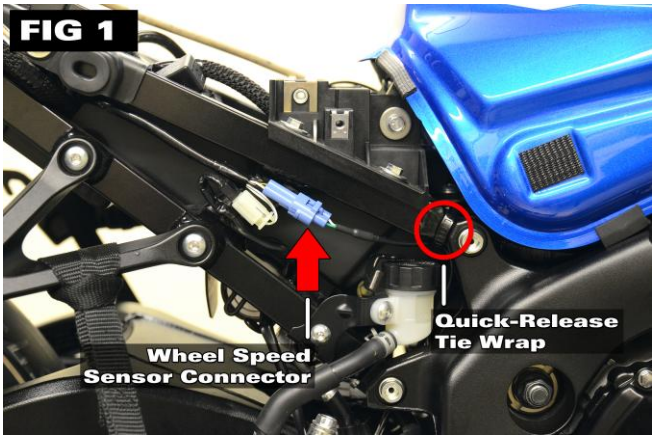

Hayabusa

- Lift and support the fuel tank.
- Disconnect the black WSS connector (Fig 2).
- Plug the WSS extension harness in line with the OEM WSS wiring.
- Route wiring along the swingarm. Check for secure fit and clearance around any moving parts/exhaust.

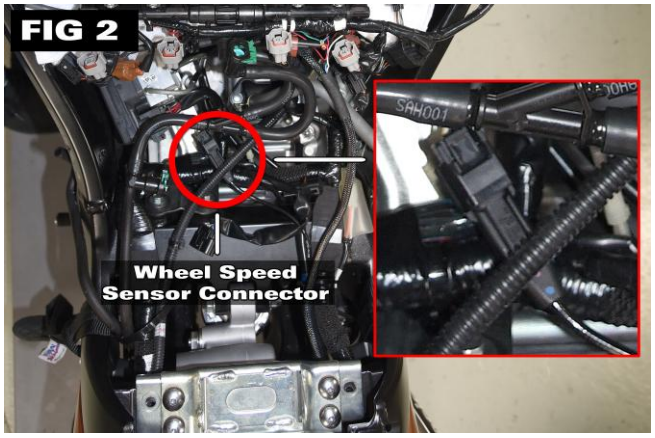

ALL BROCK'S PERFORMANCE PRODUCTS ARE DESIGNED FOR CLOSED-COURSE RACETRACK USE ONLY!

For more information on Brock's Performance Warranty and Terms and Conditions:
BrocksPerformance.com > Brock's Support > Customer Service > Terms and Conditions
For Questions and Comments:
BrocksPerformance.com > Brock's Support > Customer Service > Contact Us or call 937-912-0054