



[Brock's Performance](#) • 4064 E. Patterson Road • Dayton, OH 45430 • Phone: 937-912-0054 • Fax: 937-912-0062

## WHEEL SPEED SENSOR EXTENSION HARNESS HAYABUSA (13-20) & GSX-R1000 (17-23) PRODUCT INFORMATION

**For extended bike applications, this Wheel Speed Sensor (WSS) Extension Harness simply plugs in-line with the OEM wheel speed sensor. No cutting or splicing required. Functions with the OEM ABS and TCS.**

### Package Contents:

WSS Extension Harness shown:

1. One (1) WSS Extension Harness
2. One (1) Product Information Page

**If your package contents differ, please contact Brock's Performance at 937-912-0054.**

**For additional installation support please refer to the OEM service manual.**


### Installation Notes:

#### GSX-R1000

- Remove the right side frame cover.
- Disconnect the blue WSS connector (Fig 1).
- Remove the quick-release tie wrap (can be reused) securing the WSS wiring (Fig 1).
- Plug the WSS extension harness in-line with the OEM WSS wiring.
- Route wiring along the swingarm. Check for secure fit and clearance around any moving parts/exhaust.

#### Hayabusa

- Lift and support the fuel tank
- Disconnect WSS connector
- Plug the WSS extension harness in-line with the OEM WSS wiring
- Route wiring along the swingarm. Check for secure fit and clearance around any moving parts/exhaust.

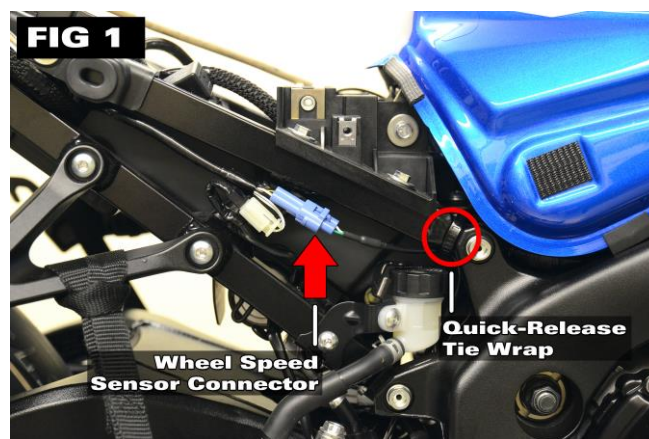

**ALL BROCK'S PERFORMANCE PRODUCTS ARE DESIGNED FOR CLOSED-COURSE RACETRACK USE ONLY!**

For more information on Brock's Performance Warranty and Terms and Conditions:  
**[BrocksPerformance.com](#) > [Brock's Support](#) > [Customer Service](#) > [Terms and Conditions](#)**

For Questions and Comments:  
**[BrocksPerformance.com](#) > [Brock's Support](#) > [Customer Service](#) > [Contact Us](#) or call 937-912-0054**