



2001-2006 GSX-R1000 ADJUSTABLE LOWERING LINKS-3 HOLE

Note: These instructions-as well as additional details can be found at: www.BrocksPerformance.com

1. Rear of bike MUST be SOUNDLY SECURED during installation! (Fig 1) See Helpful Hint Below.
2. Check the drive chain adjustment after installation.
3. Side Stand may have to be shortened.
4. Torque to 78 N.m (56.5 lb-ft).




This Package Contains:

2 Brocks Performance Adjustable Lowering Links



Fig 1

WARNING: Chassis adjustments can alter the handling characteristics of the machine. A lowered vehicle is more likely to experience obstacle and cornering clearance contact problems, especially with the addition of a passenger. This product is designed for closed-course drag strip use only!

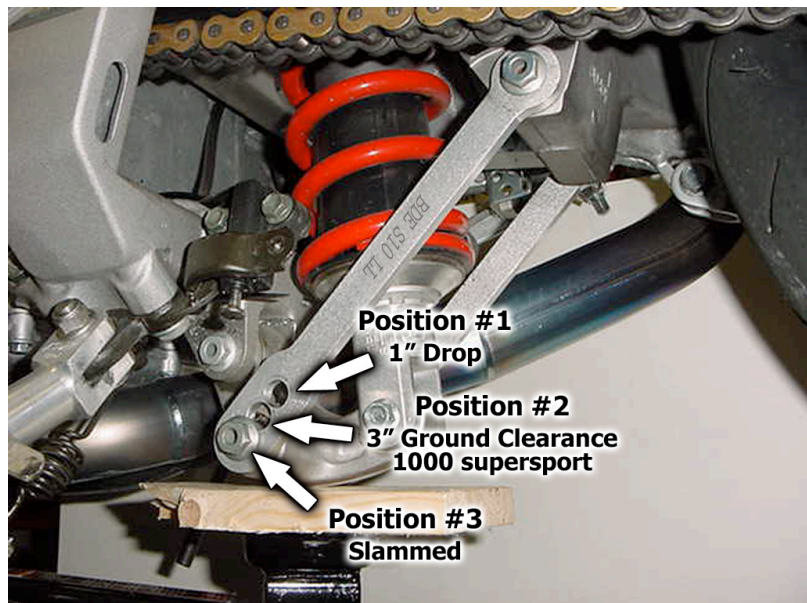

HELPFUL HINT: We have found that a rear stand and floor jack are most useful during installation and adjustments. A thin block of wood placed between the lower stock pivot and the floor jack allows the bike to move in the direction required, without damaging the pivot.

All Brock's Performance products are designed for closed-course racetrack use ONLY!

For more information on Brock's Performance Warranty and Terms and Conditions: www.BrocksPerformance.com > About Us > Terms and Conditions

For Questions and Comments: www.BrocksPerformance.com > Customer Service > Contact Us
or call the Tech Line 937-912-0054