




Installation Instructions:

Oil Cooler Removal Kit
GSX-R1000 (07-08)




This Package Contains:

17" Stainless Oil Line
2 Brass Fittings
2 Oil Fitting Housings
2 O-Rings

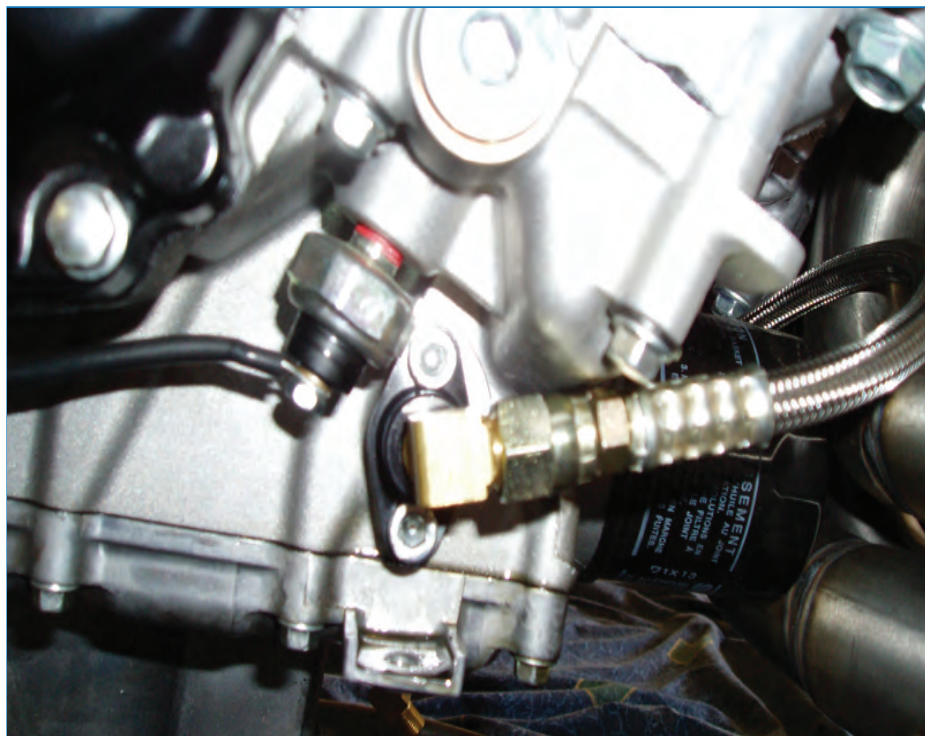

Instructions

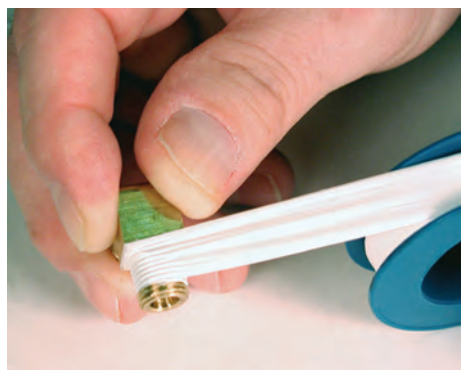

- Remove lower fairings and drain oil.
- Remove long oil cooler line from oil cooler and oil pan.
- Apply lithium grease to O-rings, place O-ring in each oil fitting housing groove.
- Attach oil fitting housings to oil cooler and oil pan using stock bolts, torque bolts to 10 N·m (7.0 lb-ft).
- Wrap brass fittings with Teflon tape* as shown, leave the first two threads bare.
*A liquid thread sealant may be used in place of Teflon tape.
- Thread brass fittings into oil fitting housings, tighten and position as shown in photo.
- Oil line should have **NO** sharp bends and **must NOT contact exhaust under any circumstances.**
- Attach oil line to brass fittings, hand tighten plus ¼ turn.
- Refill with oil, start bike and inspect all connections for leaks.
- Reinstall lower fairings.

ALL BROCK'S PERFORMANCE PRODUCTS ARE DESIGNED FOR CLOSED-COURSE RACETRACK USE ONLY!

For more information on Brock's Performance Warranty and Terms and Conditions:

BrocksPerformance.com > Brock's Support > Customer Service > Terms and Conditions

For Questions and Comments:

BrocksPerformance.com > Brock's Support > Customer Service > Contact Us or call 937-912-0054