



[Brock's Performance • 4064 E. Patterson Road • Dayton, OH 45430 • Phone: 937-912-0054 • Fax: 937-912-0062](#)



## NINJA H2 (15-21) & NINJA H2 SX\SE\SE+ (18-21) PAIR BLOCK-OFF CAP INSTRUCTIONS

The black cap is used to block the flow of fresh air into the exhaust system preventing 'deceleration pop'. Blocking the PAIR system is also required for proper fuel tuning of the bike.

### Instructions:

For additional installation support please refer to the OEM service manual.

1. Remove the fuel tank cover.
2. Locate the PAIR hose in front of the intake plenum and remove it from the nipple. (Fig 1- *fuel tank removed for clarity*).
3. Lubricate the black cap using WD-40 or Windex.
4. Use a long, slender, and dull-ended object (e.g. Sharpie marker or 3/8" drive extension to prevent damage to the cap during installation) push the cap into the PAIR hose (Fig 2).
5. Reinstall the PAIR hose onto the nipple.
6. Reinstall fuel tank cover.

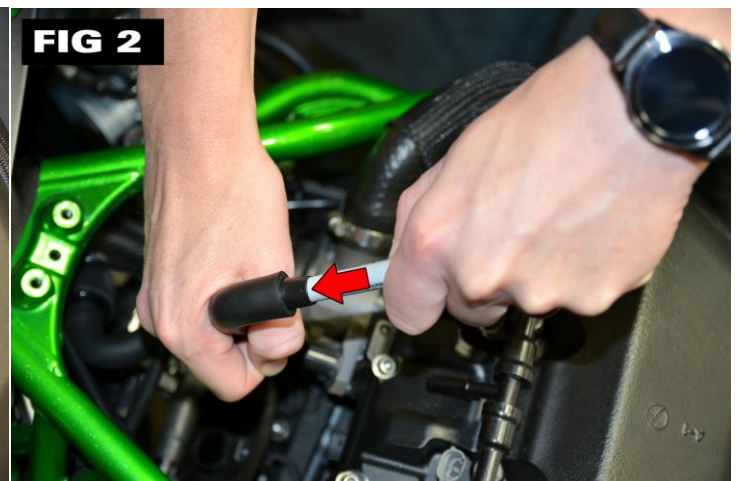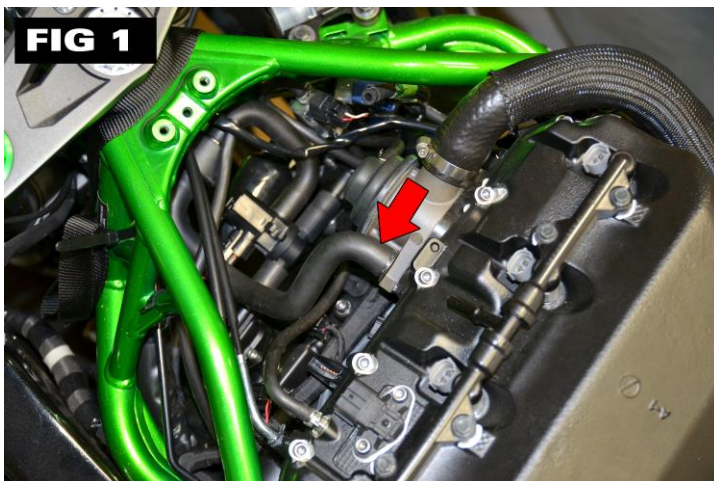

**ALL BROCK'S PERFORMANCE PRODUCTS ARE DESIGNED FOR CLOSED-COURSE RACETRACK USE ONLY!**

For more information on Brock's Performance Warranty and Terms and Conditions:

**[BrocksPerformance.com](#) > [Brock's Support](#) > [Customer Service](#) > [Terms and Conditions](#)**

For Questions and Comments:

**[BrocksPerformance.com](#) > [Brock's Support](#) > [Customer Service](#) > [Contact us](#) or call 937-912-0054**