



[Brock's Performance](http://www.brocksp.com) • 4064 E. Patterson Road • Dayton, OH 45430 • Phone: 937-912-0054 • Fax: 937-912-0062



Kawasaki Z H2 (20-24) PAIR Block-Off Cap Installation Instructions


The black cap included with your exhaust system purchase is used to block off the flow of fresh air into the exhaust system preventing 'deceleration pop'. Blocking of the PAIR system is also required for proper fuel tuning of the bike.

For additional installation support please refer to the OEM service manual.

Installation Instructions:

- Remove the left side inner cowling cover, left outer shroud, and air filter cover. (Fig 1)
- Remove the coolant reservoir and set it to the side. (Fig 2)
- Remove front bolts securing the ram air assembly. (Fig 2)
- Remove bolts securing the ram air assembly to the supercharger. (Fig 3)
- Disconnect the hose from the breather body. (Fig 3)
- Disconnect the blow off valve hose from the ram air assembly.
- Pull the ram air assembly away from the frame to access the PAIR hose.
- Remove the PAIR hose from the ram air assembly. Install the supplied cap onto the nipple of the ram air assembly. (Fig 4)
- Reinstall the PAIR hose over the black cap (lubricate cap to ease installation).
- Reinstall the ram air assembly and reconnect the blow off hose and breather hoses.
- Reinstall the coolant reservoir, air filter cover, left outer shroud, and left side inner cowling cover.

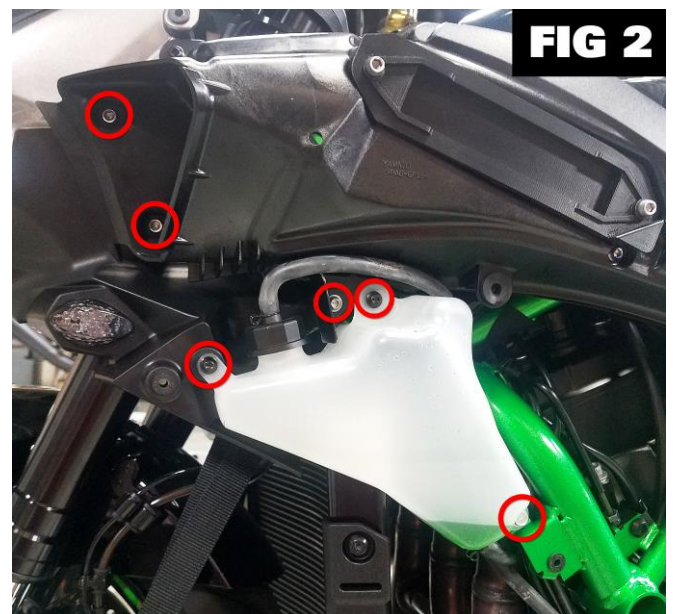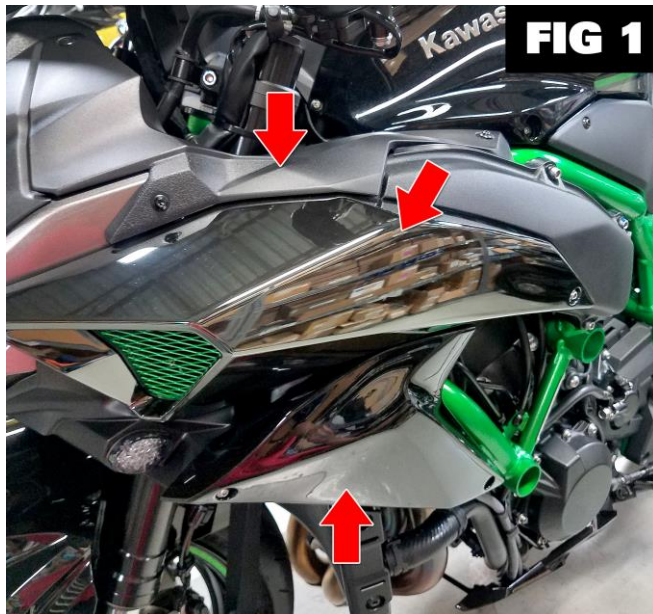

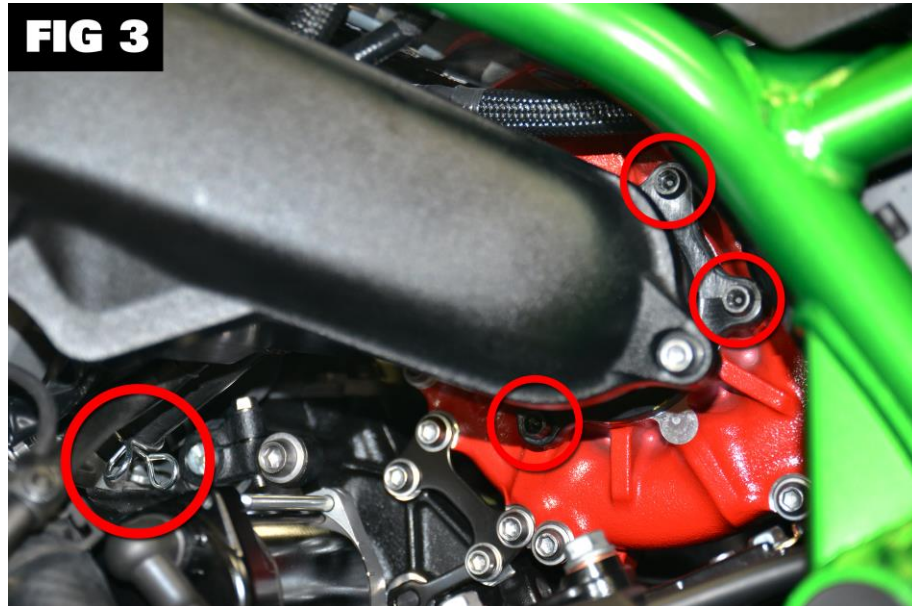

ALL BROCK'S PERFORMANCE PRODUCTS ARE DESIGNED FOR CLOSED-COURSE RACETRACK USE ONLY!

For more information on Brock's Performance Warranty and Terms and Conditions:
BrocksPerformance.com > Brock's Support > Customer Service > Terms and Conditions
For Questions and Comments:

BrocksPerformance.com > Brock's Support > Customer Service > Contact us or call 937-912-0054