



[Brock's Performance • 4064 E. Patterson Road • Dayton, OH 45430 • Phone: 937-912-0054 • Fax: 937-912-0062](#)

## H2 (15-21), H2 SX/SE/SE+ (18-21), AND Z H2 (20-23) SUPERCHARGER SPROCKET COVER INSTALLATION INSTRUCTIONS

The Brock's Supercharger Sprocket Cover is a direct replacement of the OEM sprocket cover.

### Check Package Contents:

*The Package Contents Include:*

1. One (1) Sprocket Cover
2. One (1) O-Ring



If your package contents differ, please contact Brock's Performance at 937-912-0054.

*For additional installation support please refer to the OEM service manual.*



### Instructions:

1. Support the bike using a wheel stand or lift.
2. Remove two (2) bolts securing the OEM sprocket cover. (Fig 1)
3. Carefully remove the OEM cover and O-ring.
4. Apply a light/thin coat of clean engine oil to the supplied O-Ring.
5. Install the Brock's Performance Supercharger Sprocket Cover. (Fig 2)
6. Install bolts removed in step 2 and torque to 89 lb-in. (10 N·m).

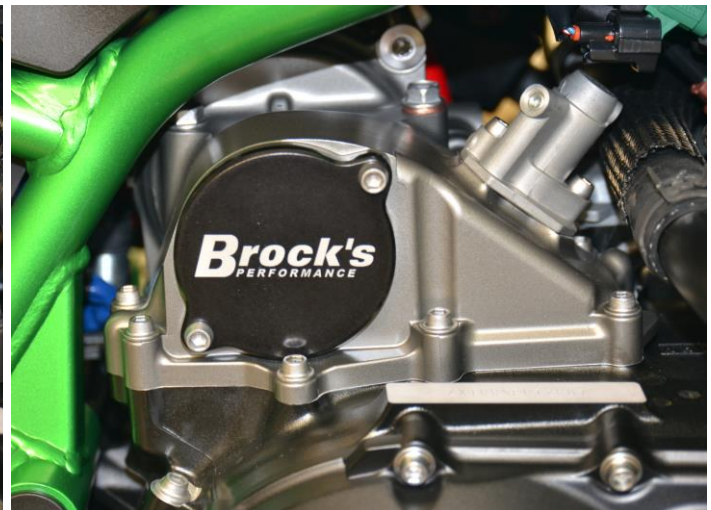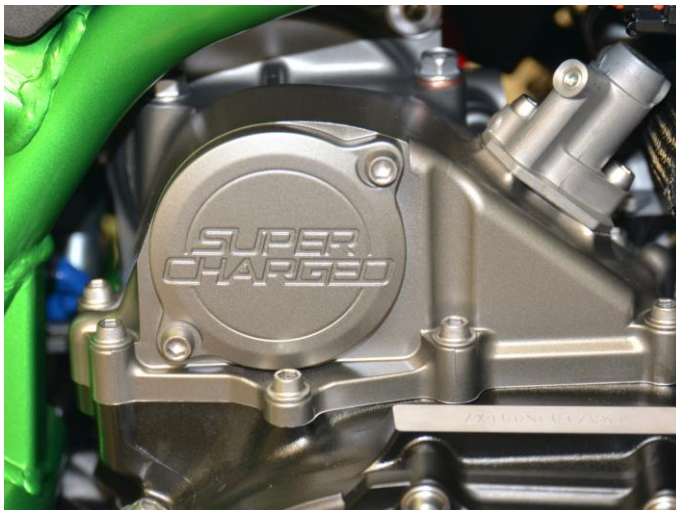

**ALL BROCK'S PERFORMANCE PRODUCTS ARE DESIGNED FOR CLOSED-COURSE RACETRACK USE ONLY!**

For more information on Brock's Performance Warranty and Terms and Conditions:

**[BrocksPerformance.com](#) > [Brock's Support](#) > [Customer Service](#) > [Terms and Conditions](#)**

For Questions and Comments:

**[BrocksPerformance.com](#) > [Brock's Support](#) > [Customer Service](#) > [Contact us](#) or call 937-912-0054**