



[Brock's Performance](#) • 4064 E. Patterson Road • Dayton, OH 45430 • Phone: 937-912-0054 • Fax: 937-912-0062

HAYABUSA (99-07) ALIEN HEAD 2 / SHORTMEG 2 SPACER KIT INSTRUCTIONS

To gain proper clearance on the Gen 1 Hayabusa when installing the Alien Head 2 or ShortMeg 2 Full Exhaust System it is necessary to install the Spacer Kit on the radiator bracket and belly pan fairing.

Check Package Contents:

The Package Contents Include:

1. Two (2) Fender Washers
2. Two (2) Flat Washers
3. Two (2) Socket Cap Bolts
4. Two (2) Button Head Bolts
5. Two (2) Belly Pan Standoffs
6. Two (2) Belly Pan Spacers
7. Two (2) Radiator Spacers




If your package contents differ, please contact Brock's Performance at 937-912-0054.

For additional installation support please refer to the OEM service manual.


STEP 1 (Radiator Bracket):

The OEM bolts will no longer be required. Place one flat washer (B) on each socket cap bolt (A) and insert through the OEM radiator bracket. Place one radiator spacer (C) on each bolt before tightening to the engine block. This spacer provides adequate clearance between the exhaust pipes and radiator. Torque each socket cap bolt (A) to 77 in-lb. (8.7 Nm).

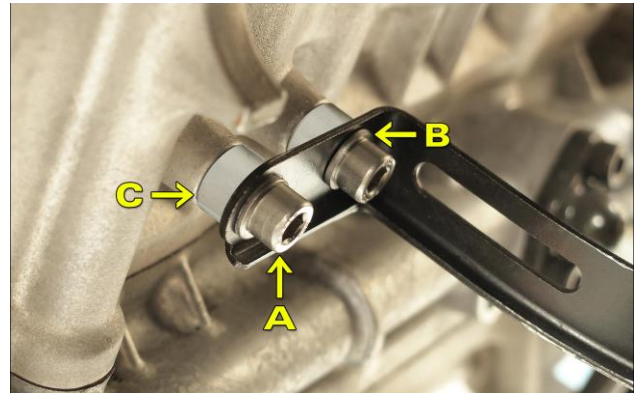

STEP 2 (Belly Pan):

The OEM bolts will no longer be required. Place one fender washer (E) on each button head bolt (D), followed by one belly pan standoff (F) on each bolt. Insert assembly through the underside of the belly pan. Place one belly pan spacer (G) over the assembly (between the belly pan & bracket) before tightening to the bracket.

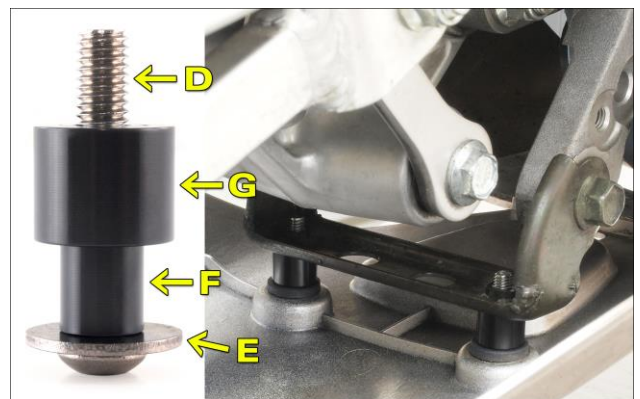

ALL BROCK'S PERFORMANCE PRODUCTS ARE DESIGNED FOR CLOSED-COURSE RACETRACK USE ONLY!

For more information on Brock's Performance Warranty and Terms and Conditions:

[BrocksPerformance.com](#) > [Brock's Support](#) > [Customer Service](#) > [Terms and Conditions](#)

For Questions and Comments:

[BrocksPerformance.com](#) > [Brock's Support](#) > [Customer Service](#) > [Contact us](#) or call 937-912-0054