

Brock's PERFORMANCE

Brock's Performance • 4064 E. Patterson Road • Dayton, OH 45430 • Phone: 937-912-0054 • Fax: 937-912-0062


Oil Cooler Removal Kit Hayabusa (99-20)

P/N: 250581



This Package contains:

- 6.5" Oil Line
- 2 Brass Fittings
- 2 Oil Fitting Housings
- 2 O-Rings

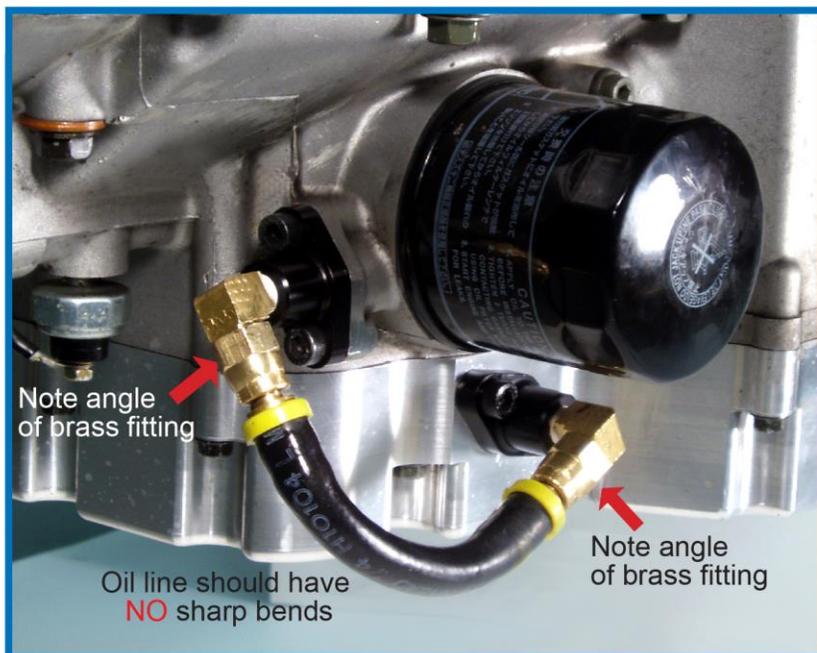

Instructions



- Remove lower fairings, exhaust system, and drain oil.
- Remove oil cooler lines from engine and oil pan.
- Remove bolts, bracket and oil cooler.
- Apply lithium grease to o-rings, place o-ring in each oil fitting housing groove.



- Attach oil fitting housings to engine and oil pan using stock bolts. Torque bolts to 10 N·m (7.0 lb-ft).
- Wrap brass fittings with Teflon tape* as shown, leave the first two threads bare.

*A liquid thread sealant may be used in place of Teflon tape.



- Thread brass fittings into oil fitting housings, tighten.
- Position of brass fittings is important. See photo.
- Oil line should have NO sharp bends.
- Attach oil line to brass fittings, hand tighten plus 1/4 turn.
- Refill with oil, start bike, inspect all connections for leaks, and reinstall lower fairings.

ALL BROCK'S PERFORMANCE PRODUCTS ARE DESIGNED FOR CLOSED-COURSE RACETRACK USE ONLY!

For more information on Brock's Performance Warranty and Terms and Conditions:

BrocksPerformance.com > Brock's Support > Customer Service > Terms and Conditions

For Questions and Comments:

BrocksPerformance.com > Brock's Support > Customer Service > Contact Us or call 937-912-0054