



[Brock's Performance](#) • 4064 E. Patterson Road • Dayton, OH 45430 • Phone: 937-912-0054 • Fax: 937-912-0062


## Suzuki Katana (2020) PAIR Block-Off Cap Installation Instructions

The black cap and zip tie included with your exhaust system purchase are used to block off the flow of fresh air into the exhaust system preventing 'deceleration pop'. Blocking off the PAIR system is also required for proper fuel tuning of the bike.

*For additional installation support please refer to the OEM service manual.*

### Installation Instructions:

- Remove seat and front/side frame covers. Remove fuel tank.
- Locate the PAIR hose on the left-hand side of the airbox. (Fig 1)
- Disconnect the PAIR hose from the airbox nipple. (Fig 1)
- Lubricate the block-off cap/nipple with WD-40 or Windex.
- Install supplied cap onto the airbox nipple. (Fig 2)
- Reinstall the PAIR hose over the nipple/cap and secure with the supplied zip tie (OEM hose clamp is not reused). (Fig 3)
- Reinstall fuel tank. Install front/side frame covers and seat.

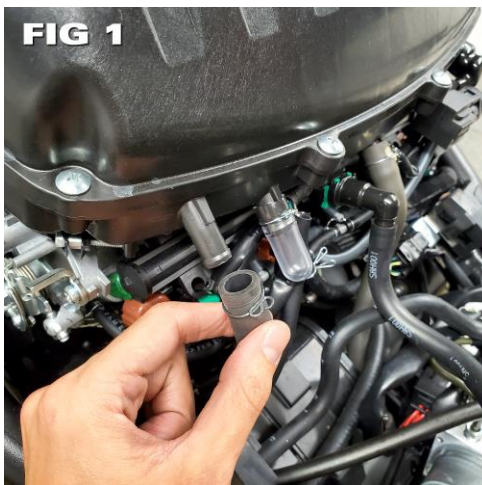

**ALL BROCK'S PERFORMANCE PRODUCTS ARE DESIGNED FOR CLOSED-COURSE RACETRACK USE ONLY!**

For more information on Brock's Performance Warranty and Terms and Conditions:

**[BrocksPerformance.com](#) > [Brock's Support](#) > [Customer Service](#) > [Terms and Conditions](#)**

For Questions and Comments:

**[BrocksPerformance.com](#) > [Brock's Support](#) > [Customer Service](#) > [Contact us](#) or call 937-912-0054**