



[Brock's Performance](#) • 4064 E. Patterson Road • Dayton, OH 45430 • Phone: 937-912-0054 • Fax: 937-912-0062

## KAWASAKI NINJA 300 (13-17) PAIR BLOCK-OFF CAP INSTALLATION INSTRUCTIONS

The black cap is used to block off the flow of fresh air into the exhaust system preventing 'deceleration pop'. Blocking the PAIR system is also required for proper fuel tuning of the bike.


***For additional installation support please refer to the OEM service manual.***

**1.** The PAIR hose is located on the left-hand side of the bike (Fig 1). Remove the left-hand side fairings for easy access to the PAIR hose.

**2.** With the side fairing removed locate the PAIR hose coming out of the top of the engine (Fig 2).

**3.** Remove the PAIR hose and insert the black cap that was included with the exhaust system purchase into the hose. Lubricate the black cap with Windex or WD-40 and use a 3/8" drive extension or sharpie marker to push the cap in.

**4.** Make sure the cap is inserted at least 1" (25 mm) to allow for the hose to be reinstalled. Reinstall the PAIR hose onto the engine plate from which it was removed (Fig 2).

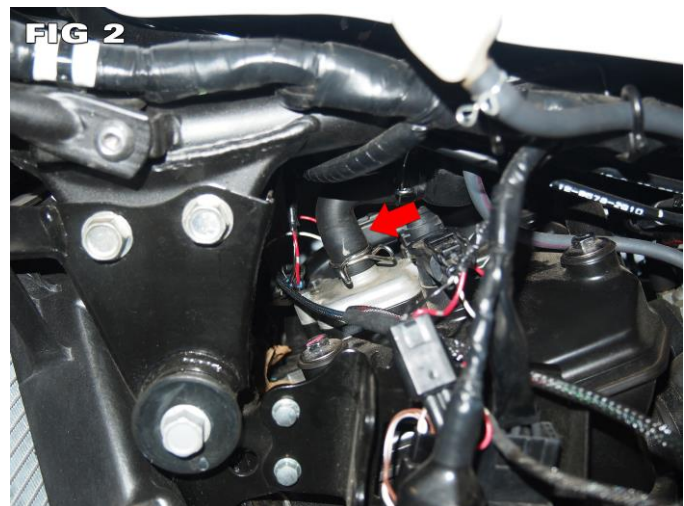

**ALL BROCK'S PERFORMANCE PRODUCTS ARE DESIGNED FOR CLOSED-COURSE RACETRACK USE ONLY!**

For more information on Brock's Performance Warranty and Terms and Conditions:

**[BrocksPerformance.com](#) > [Brock's Support](#) > [Customer Service](#) > [Terms and Conditions](#)**

For Questions and Comments:

**[BrocksPerformance.com](#) > [Brock's Support](#) > [Customer Service](#) > [Contact us](#) or call 937-912-0054**