





[Brock's Performance](http://Brock's Performance) • 4064 E. Patterson Road • Dayton, OH 45430 • Phone: 937-912-0054 • Fax: 937-912-0062

## BMW S1000RR (10-18) PAIR BLOCK-OFF CAP INSTALLATION INSTRUCTIONS

The red cap is used to block off the flow of fresh air into the exhaust system preventing 'deceleration pop'.  
Blocking the PAIR system is also required for proper fuel tuning of the bike.

For additional installation support please refer to the OEM service manual.

1. Remove two bolts securing the seat.
2. Remove right side fuel tank trim (Fig 1).
3. Locate the PAIR hose at the airbox (Fig 2).
4. Press on both sides of the hose connector and remove from airbox (Fig 3).
5. Insert the supplied red cap into the hole where the hose connects (Fig 4).
6. Reinstall the PAIR hose, side fuel tank trim, and seat.

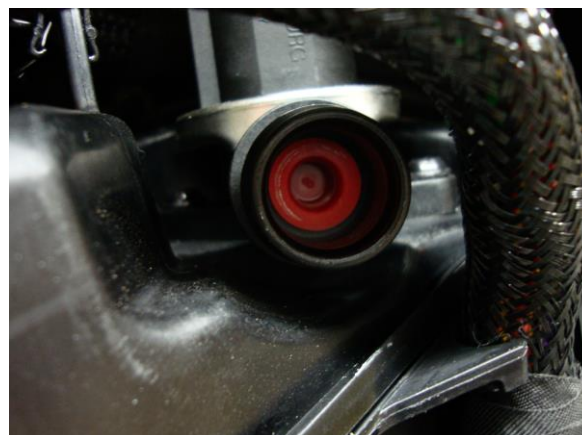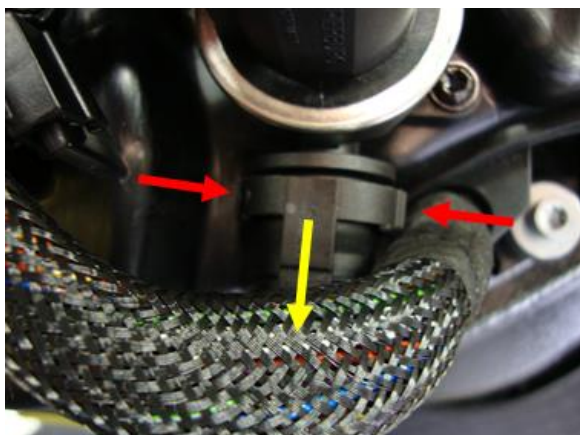

**ALL BROCK'S PERFORMANCE PRODUCTS ARE DESIGNED FOR CLOSED-COURSE RACETRACK USE ONLY!**

For more information on Brock's Performance Warranty and Terms and Conditions:  
[BrocksPerformance.com](http://BrocksPerformance.com) > **Brock's Support** > **Customer Service** > **Terms and Conditions**

For Questions and Comments:

[BrocksPerformance.com](http://BrocksPerformance.com) > **Brock's Support** > **Customer Service** > **Contact us** or call 937-912-0054