



[Brock's Performance](#) • 4064 E. Patterson Road • Dayton, OH 45430 • Phone: 937-912-0054 • Fax: 937-912-0062

## KAWASAKI Z900 (17-23) PAIR Block-Off Cap Installation Instructions

The black cap included with your exhaust system purchase is used to block off the flow of fresh air into the exhaust system preventing 'deceleration pop'. Blocking of the PAIR system is also required for proper fuel tuning of the bike.


For additional installation support please refer to the OEM service manual.

### Installation Instructions:

- Remove front and rear seats.
- Remove fuel tank covers and ignition switch cover.
- Remove frame covers and side covers.
- Remove seat bracket and fuel tank.
- Remove ECU and air cleaner housing.

**Note:** Be careful to avoid debris entering the throttle bodies; cover with clean rags while working.

- Locate the PAIR hose on the right-hand side of the air cleaner housing (Fig 1).
- Install the supplied cap onto the PAIR nipple located on the underside of the air cleaner housing (Fig 2).
- Lubricate the block-off cap/nipple with WD-40 or Windex. Place the PAIR hose over the block-off cap/nipple.
- Reinstall the air cleaner housing, ECU, fuel tank, seat bracket, side covers, frame covers, ignition switch cover, fuel tank covers, front and rear seats.

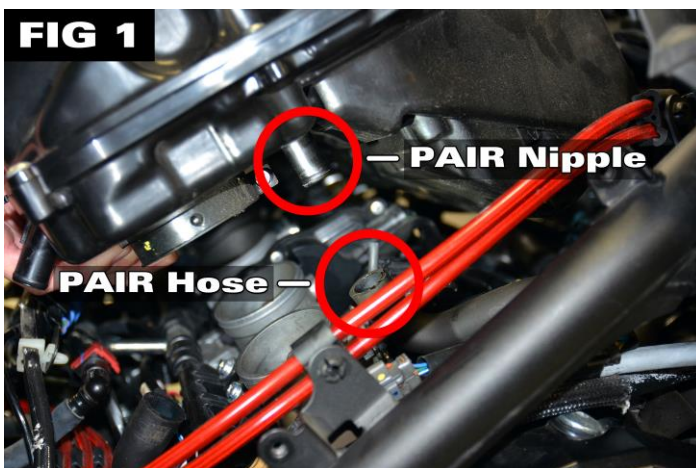

**ALL BROCK'S PERFORMANCE PRODUCTS ARE DESIGNED FOR CLOSED-COURSE RACETRACK USE ONLY!**

For more information on Brock's Performance Warranty and Terms and Conditions:  
[BrocksPerformance.com](#) > [Brock's Support](#) > [Customer Service](#) > [Terms and Conditions](#)  
 For Questions and Comments:

[BrocksPerformance.com](#) > [Brock's Support](#) > [Customer Service](#) > [Contact us](#) or call 937-912-0054