



[Brock's Performance](#) • 4064 E. Patterson Road • Dayton, OH 45430 • Phone: 937-912-0054 • Fax: 937-912-0062

## KAWASAKI Z900RS/CAFE (18-22) FRONT SPROCKET KIT INSTRUCTIONS

**This kit directly replaces the OEM front sprocket on Kawasaki Z900RS/Cafe models. The smaller sprocket (vs. OEM) in this kit increases the torque applied to the rear wheel, which then allows for faster acceleration.**

### Package Contents:

Front Sprocket Kit shown:

1. One (1) Front Sprocket
2. Two (2) Shims




**If your package contents differ, please contact Brock's Performance at 937-912-0054.**

**For additional installation support please refer to the OEM service manual.**

### Installation Notes:

- Follow the OEM service manual for front sprocket removal and installation.
- When loosening or tightening the engine sprocket nut, apply the rear brake to prevent movement.
- Install one (1) shim on each side of the sprocket.
- The stamping on the sprocket faces outward.
- It is recommended to replace the bent tab washer and rear axle cotter pin (not included).
- Torque engine sprocket nut to 108 lb.-ft (147 N·m).
- Adjust drive chain as needed.

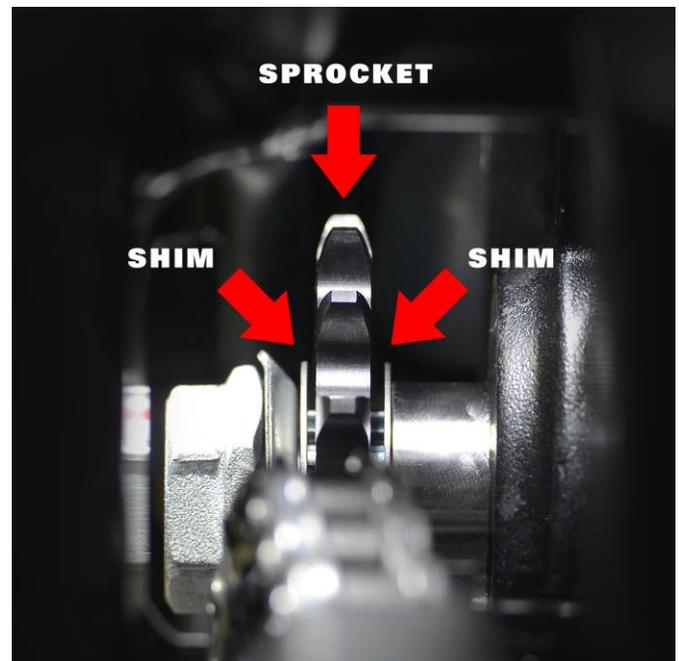

**ALL BROCK'S PERFORMANCE PRODUCTS ARE DESIGNED FOR CLOSED-COURSE RACETRACK USE ONLY!**

For more information on Brock's Performance Warranty and Terms and Conditions:

**[BrocksPerformance.com](#) > [Brock's Support](#) > [Customer Service](#) > [Terms and Conditions](#)**

For Questions and Comments:

**[BrocksPerformance.com](#) > [Brock's Support](#) > [Customer Service](#) > [Contact Us](#) or call 937-912-0054**