



Brock's Performance • 4064 E. Patterson Road • Dayton, OH 45430 • Phone: 937-912-0054 • Fax: 937-912-0062

KAWASAKI Z900RS/CAFE (18-22) VELOCITY STACK KIT INSTALLATION INSTRUCTIONS

The Brock's Performance Velocity Stack Kit for the Kawasaki Z900RS/Cafe is an airbox mod designed to maximize airflow for increased peak power.

Package Contents:

Velocity Stack Kit shown:

1. Two (2) Velocity Stacks

If your package contents differ, please contact Brock's Performance at 937-912-0054.

For additional installation support please refer to the OEM service manual.



FIG 1

Installation Instructions:

1. Support the bike using a wheel stand or lift.
2. Raise and support front of fuel tank.
3. Remove air cleaner housing.
4. Remove air cleaner housing cover.
5. Remove OEM velocity stacks.
 - a. Inner velocity stacks (#2 & #3) will not be reused.
 - b. Outer velocity stacks (#1 & #4) will be relocated.
6. Cut off clamp locator nipple on supplied stacks (Fig 2).
7. Install OEM outer velocity stacks (#1 & #4) to the two middle positions (#2 & #3) (Fig 1).
 - a. The tabs on the bottom of the stacks align to the outer tab on the air cleaner housing (Fig 3).
8. Install supplied velocity stacks to the two outer cylinders (#1 & #4) (Fig 1).
9. Install air cleaner housing cover.
10. Install air cleaner housing.
11. Torque velocity stack clamps to 18 lb-in (2.0 N·m).
12. Reinstall fuel tank.
13. Start bike and check for any air leaks.

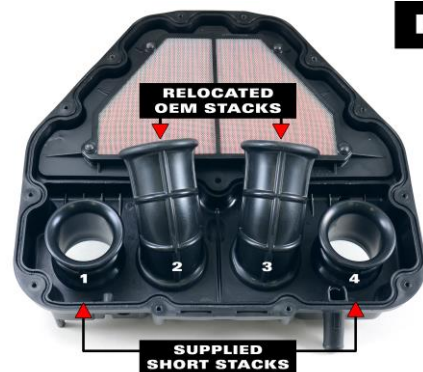


FIG 2



FIG 3



ALL BROCK'S PERFORMANCE PRODUCTS ARE DESIGNED FOR CLOSED-COURSE RACETRACK USE ONLY!

For more information on Brock's Performance Warranty and Terms and Conditions:

BrocksPerformance.com > Brock's Support > Customer Service > Terms and Conditions

For Questions and Comments:

BrocksPerformance.com > Brock's Support > Customer Service > Contact us or call 937-912-0054