





[Brock's Performance](#) • 4064 E. Patterson Road • Dayton, OH 45430 • Phone: 937-912-0054 • Fax: 937-912-0062

KAWASAKI ZX-10R (06-07) PAIR BLOCK-OFF CAP INSTALLATION INSTRUCTIONS

The black cap is used to block off the flow of fresh air into the exhaust system preventing 'deceleration pop' and ram air pressure loss. Blocking the PAIR system is also required for proper fuel tuning of the bike.

For additional installation support please refer to the OEM service manual.

1. Lift and prop the gas tank.
2. Locate the PAIR hose (Fig 1).
3. Remove air box cover, air filter, and velocity stacks (Fig 2).
4. Disconnect sensor from the rear of the airbox (Fig 2).
5. Remove hoses from the rear of airbox (Fig 3).
6. Remove airbox.
7. Remove PAIR hose from the airbox port.
8. Lubricate the black cap using WD-40 or Windex.
9. Use a long, slender, and dull-ended object (e.g. Sharpie Marker or 3/8" drive extension to prevent damage to the cap during installation) push the cap into the PAIR hose 1 in. (25 mm) (Fig 4).
10. Reinstall the PAIR hose onto the airbox nipple.
11. Reinstall hoses, sensor, velocity stacks, air filter, and airbox cover.

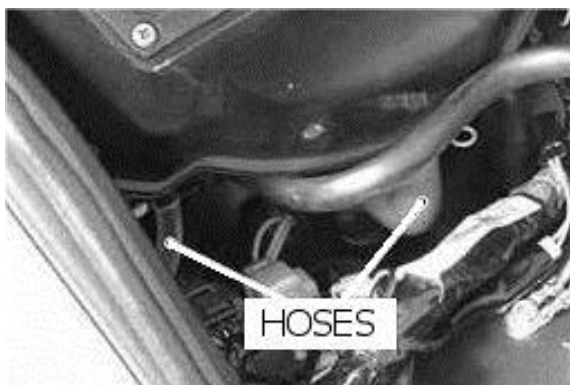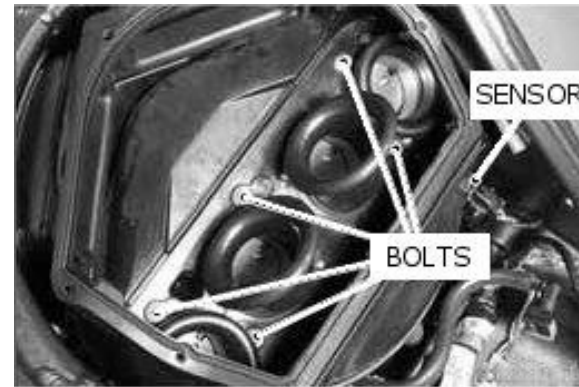

ALL BROCK'S PERFORMANCE PRODUCTS ARE DESIGNED FOR CLOSED-COURSE RACETRACK USE ONLY!

For more information on Brock's Performance Warranty and Terms and Conditions:

[BrocksPerformance.com](#) > [Brock's Support](#) > [Customer Service](#) > [Terms and Conditions](#)

For Questions and Comments:

[BrocksPerformance.com](#) > [Brock's Support](#) > [Customer Service](#) > [Contact us](#) or call 937-912-0054